

> PV-ezRack Trapezoidal Installation Manual

Roof mounting system for PV modules

For trapezoidal sheet roofs

Table of Content

Chapter		Page
1.	Introduction	2
2.	System Overview	3
3.	Tools Required	4
4.	Installation	5
5.	Warranty	10



> 1. Introduction

The most simple and cost-effective industrial roof mounting system

Clenergy's PV-ezRack Trapezoidal is a roof mounting solution suitable for all trapezoid metal sheet roofing. The whole system contains only 4 components including our innovative z-modules as part of our module clamps for easy and very fast installation offering the most advantageous and cost-effective solution for trapezoidal sheet roofing.

Please review this instillation and planning manual before installing your Trapezoidal system.


PV-ezRack Trapezoidal when installed in accordance with this guide will be structurally adequate and will meet the DIN 1055 standards. When installing this product please observe the appropriate health and safety regulations and take required safety precautions.


If necessary, please check that you are using the current version of our installation manual by contacting our local distributor our regional Clenergy office or by e-mail at sales@clenergy.com.

The installer is solely responsible for:


- Complying with all applicable building codes, including any that may superseded this manual.
- Ensuring that PV-ezRack and other products are appropriate for the particular installation and the installation environment.
- Ensuring that the structural strength of the roof is able to support the PV array and the live load conditions placed upon it.
- Ensure PV ez Rack Trapezoidal is able to take wind loadings at project location, factors such as height of the building, tapograghy of the site, position of array on the roof, and wind zone should be taken into concideration.
- Using only PV-ezRack Trapezoidal components (substitution of parts may void the warranty).
- Ensuring that the U-Profile kit with the correct number and type of screws are selected for your specific project.
- · Maintaining the waterproof integrity of the roof.
- Ensure that there are no less than two professional workers during panel installation.
- That the installation of relative electrical equipment is performance by professional lectrician, ensuring safe installation of all electrical aspects of the PV array.

> 2. System Overview

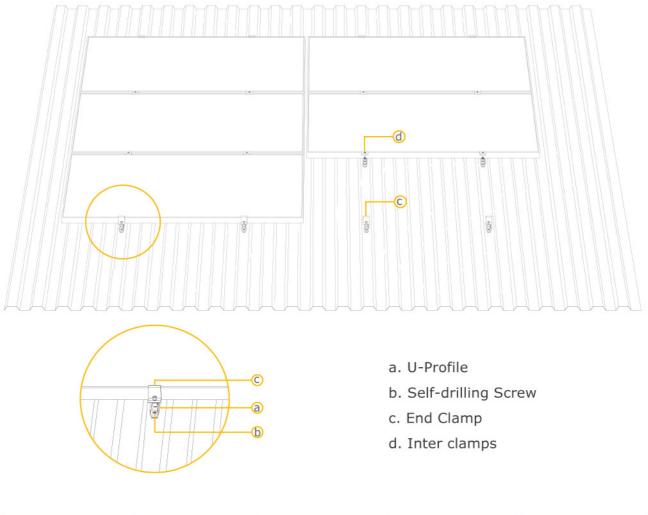

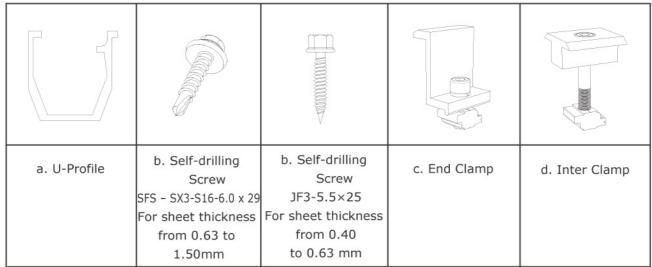

> 3. Tools Required

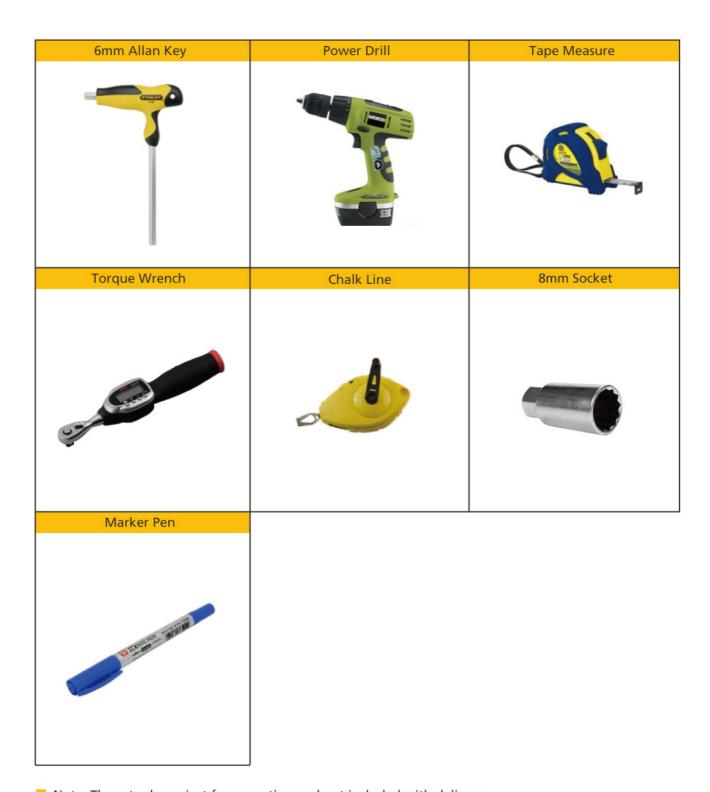


Note: These tools are just for mounting and not included with delivery.


1. Preparation

Before ordering Clenergy's PV-ezRack Trapezoidal, please check that:

- a) The roof structure is able to support the PV array.
- b) PV-ezRack Trapizoidal is able to take the wind loadings based on location, height, position on the roof and wind zone.

The distance between the two U-Profiles will depend upon the trapozoidal sheet profile but should be as near as possible half the PV module length apart. On the short side of the module always leave a expansion gap, idealy 17mm.

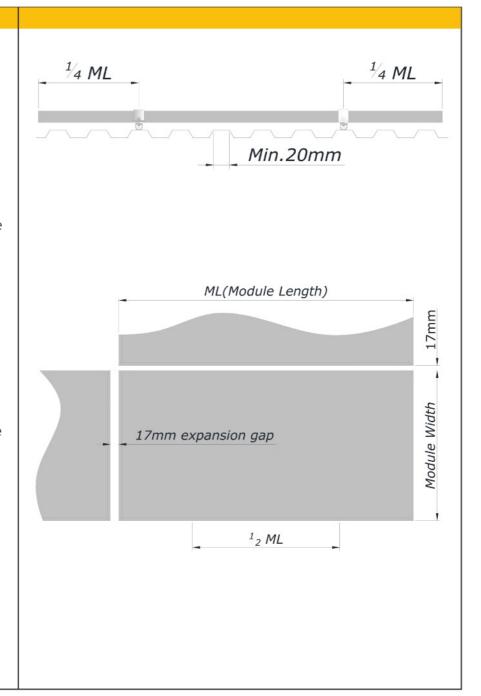

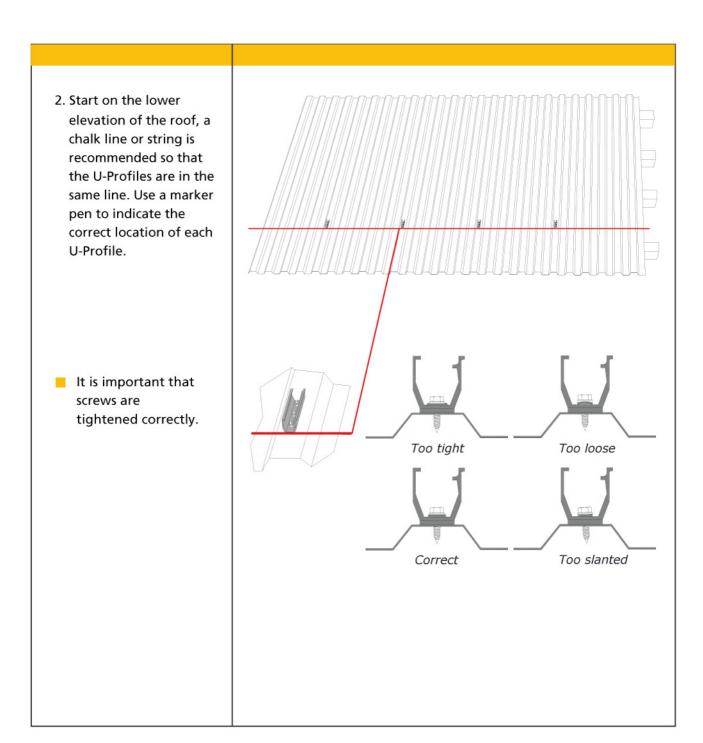

3. Mount the second row of U-Profiles. The distance between the two rows will be: D= Module width + 17 mm. Continue to mount the rest of the U-Profiles in the same 9 way.

4. Mount the modules.


Mount the PV modules starting on the lower elevation of the roof.

Locate the modules according to step 1 at the 1/4 points of the modules. Next attach the end clamps to the U-Profiles as you work along the first low, and tighten the clamps with a 6mm allen key.

The module's must be placed in the middle of the U-Profile as the figure to the right shows.

Where two module face one another use inter clamps and tighten.

The recommended torque to the screws of the clamps: 20 Nm.

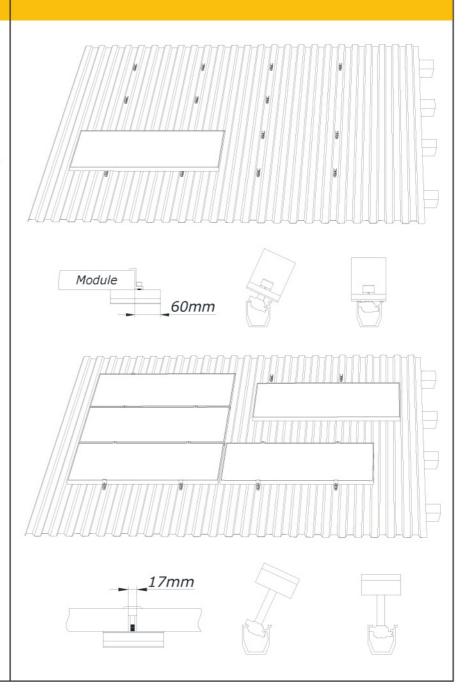


5. Installation completed.

The system now completed we would be very grateful to recieve brief details and photos of your project.

Please send to: sales@clenergy.com

The very best projects will be used as case studies and be displayed on our web site.

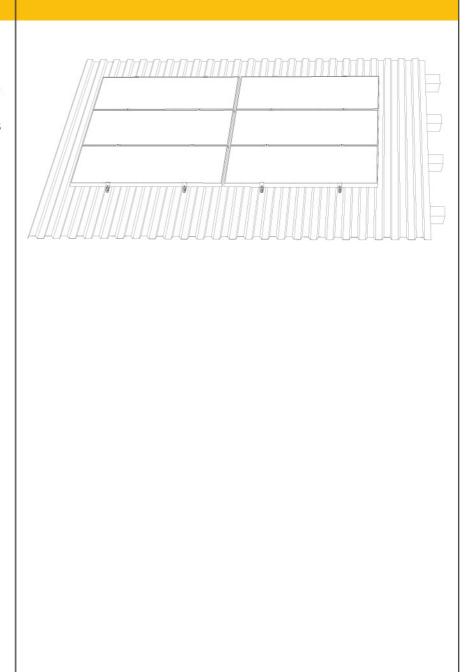

> 5. Warranty

10 Years Standard Warranty Terms and Conditions, 20 Year Designed Service Life

Clenergy international co. Ltd warrants to the original purchaser ("Purchaser") of product(s) that it manufactures ("Product") at the original installation site that the Product shall be free from defects in material and workmanship for a period of ten (10) years, except for the anodised finish, which finish shall be free from visible peeling, or cracking or chalking under normal atmospheric conditions for a period of five (5) years, from the earlier of 1) the date the installation of the Product is completed, or 2) 30 days after the purchase of the Product by the original Purchaser ("Finish Warranty").

The Finish Warranty does not apply to any foreign residue deposited on the finish. All installations in corrosive atmospheric conditions are excluded. The Finish Warranty is VOID if the practices specified by AAMA 609 & 610-02 – "Cleaning and Maintenance for Architecturally Finished Aluminum" (www.aamanet.org) are not followed by Purchaser. This Warranty does not cover damage to the Product that occurs during its shipment, storage, or installation.

This Warranty shall be VOID if installation of the Product is not performed in accordance with Clenergy's written installation instructions, or if the Product has been modified, repaired, or reworked in a manner not previously authorized by Clenergy IN WRITING, or if the Product is installed in an environment for which it was not designed. Clenergy shall not be liable for consequential, contingent or incidental damages arising out of the use of the Product by Purchaser under any circumstances.

If within the specified Warranty periods the Product shall be reasonably proven to be defective, then Clenergy shall repair or replace the defective Product, or any part thereof, in Clenergy's sole discretion. Such repair or replacement shall completely satisfy and discharge all of Clenergy's liability with respect to this limited Warranty. Under no circumstances shall Clenergy be liable for special, indirect or consequential damages arising out of or related to use by Purchaser of the Product.

Manufacturers of related items, such as PV modules and flashings, may provide written warranties of their own. Clenergy's limited Warranty covers only its Product, and not any related items.



Clenergy International

Clenergy America, Inc. 75181 Mediterranean Ave Palm Desert, CA 92211 Tel: +1 760 346 4240 Fax: +1 760 346 4249 E-mail: sales@clenergy.us www.clenergy.us

Clenergy Europe Limited
Clenergy Court, Blisworth Hill Farm
Stoke Road, Blisworth
Northampton, NN7 3DB, UK
Tel: +44 (0) 1604 857 674
Tel (Direct): +44 1604 866 004
+44 (78)27 325 357
Fax: +44 (0) 1604 858 620
E-mail: sales_uk@clenergy.com
www.clenergy.uk.com

Clenergy Germany GmbH Sophienstrasse 1 51149 Köln Tel: +49 (0) 2203 8983100 Mobile: +49 (0) 172 761 8888 Fax: +49 (0) 2203 8983129 Email: sales@clenergy-de.de www.clenergy-de.de

Clenergy China 903, No.3 Bld., Guanyinshan International Business Center, Siming District Xiamen, China 361012 Tel: +86 592 311 0088 Fax: +86 592 599 5028

E-mail: sales@clenergy.com.cn www.clenergy.com

Clenergy Australia
Unit 18, 20 Duerdin St
Clayton VIC 3168, Australia
Tel: +61 3 9017 6688
Fax: +61 3 9017 6668
E-mail: sales@clenergy.com.au
www.clenergy.com.au